


Driver Board Layout

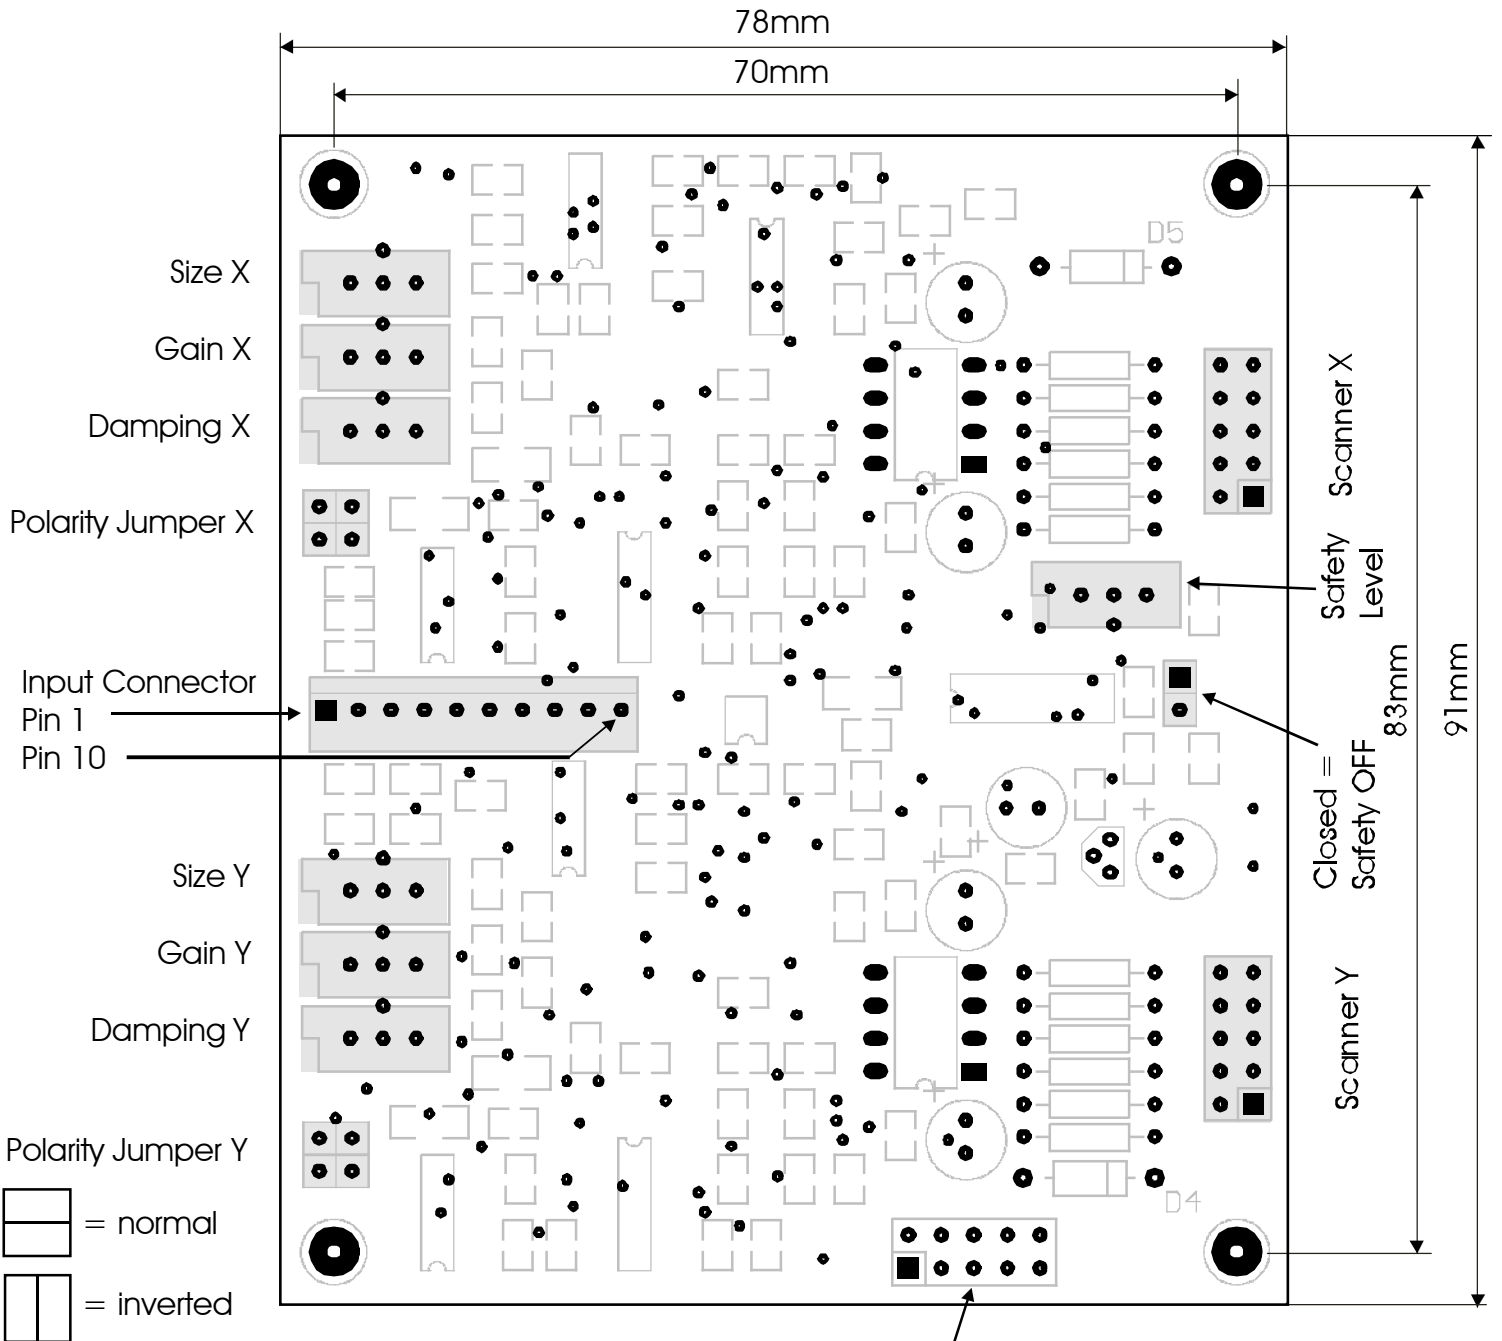


Input Connector:

- 1 +12V In
- 2 -12V In
- 3 GND
- 4 Input X+
- 5 Input X-
- 6 Blank In
- 7 Blank Out
- 8 GND
- 9 Input Y+
- 10 Input Y-

Leave unconnected!
Do NOT use!

Internal Blanking circuit

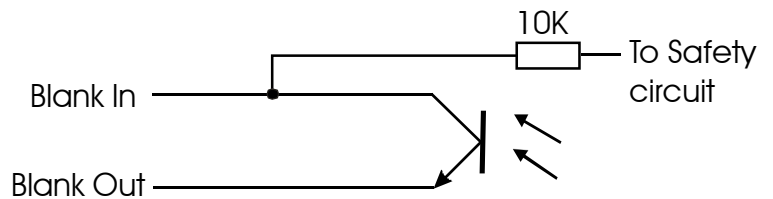

Power supply: Use regulated Power only!
Signal Input: +-10V maximum